

# Prevent Basement Flooding...

# Quality & Performance. Ask for it by name.

# Sump-pump

*SP1300: Ideal For Small or Narrow Confined Sump Pit Areas*




**MODEL SP1300**

## Features/Advantages

- Corrosion-resistant construction.
- Stainless Steel motor casing, shaft, and fasteners.
- Glass-filled thermoplastic impeller and casing.
- Bearings: Upper and lower heavy duty ball bearing construction.
- Motor is permanently lubricated for extended service life and is powered for continuous operation.  
All ratings are within the working limits of the motor.
- Complete unit is lightweight, portable and compact.
- Power cord: 10 feet long, Heavy duty with 3-prong plug.
- Built in thermal overload protection with automatic reset.
- Float Switch: Built-in non-mercury vertical type.
- Agency listings: UL & CSA Approved.
- One year warranty.

## Pump Applications

- The SP1300 has a small foot print area with a built-in vertical type switch. This design is ideal for small, narrow, or congested sump pits. A 9" diameter sump pit is all that is required for the SP1300.
- Add the SP1300 as a second pump for back-up purposes to your primary pump. Float switch failure, jammed impellers, burned out motors, and pumps left unplugged are all reasons to add a second pump. Order the Pump Mounting Kit (-PMK).
- High volume sump water inflows may require an additional pump to keep up. It is advisable not to rely exclusively on one large volume pump, but two independent pumps. Two pumps will give you the security of a stand-by secondary pump.

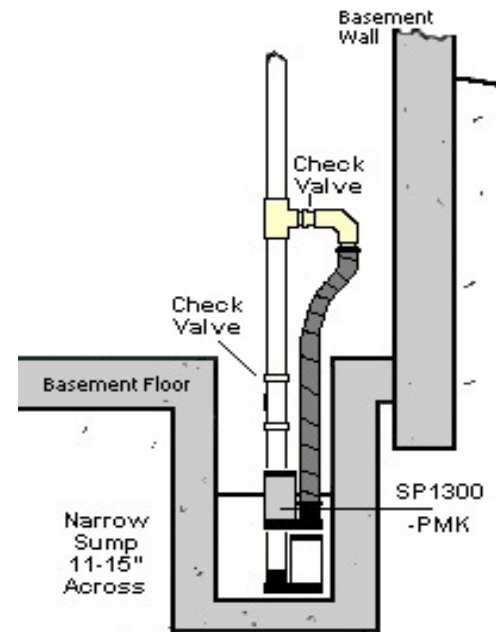

## Product Specification

### Service Requirements:

- 1/4 HP, 115V, 60Hz, single phase, 3400 RPM, 2.4 amps
- Minimum circuit breaker, 10 amps

### Pumping Rates:

- 1,300 GPH @ 9' discharge
- 1,800 GPH @ 5' discharge
- Maximum head: to 23 feet

### Dimensions:

- Pumping Range: 3"
- Minimum basin diameter: 9"
- Size: 8" Long, 6" Wide, 10" High

**Base Products Corporation**  
**Flood Prevention Products**

PO Box 1601, Buffalo, NY 14231-1601  
Phone: 716-876-5206 Fax: 716-876-5211  
Toll Free: 800-554-1426  
www.basepump.com

## Materials Included

- SP1300 Sump Pump
- 1-1/2" Pipe x 12" lg.
- Compression End Check Valve, sized to fit 1-1/2" & 1-1/4" pipe.

### Optional Equipment:

- The Pump Mounting Kit (-PMK) consists of stainless steel brackets and clamps, 1 1/2" discharge hose x 4' long, and a tee with a check valve.
- Sump level alarm for high water warning. Features include high 85 decibel horn, panel light and silence button. Operated on 110V wall plug, battery back-up, auxiliary contacts for home security system, tether float. Model: SLA.
- Basepump water powered back-up sump pumps. Three pumping capacities available. Model # RB750, HB1000, and CB1500. Refer to data sheet # BP-1180.
- Hydropump battery powered back-up sump pumps. Two mounting configurations available. Outside the pit model # RH1400 and Inside the pit model # DH1800. Refer to data sheet # RH-0109 or DH-0109.